

ECCOSORB[®] MCS

Thin, Flexible, Broadband Absorbers

Material Characteristics

- Thin, flexible, high-loss, magnetically loaded, electrically non-conductive silicone rubber sheet
- Frequency range from 800 MHz to 18 GHz
- Impervious to moisture and can be subjected to outdoor environments and high altitudes, including space, with no adverse effects
- Low out-gassing properties for space applications
- Can be cut and fitted to compound curves

Applications

- When placed within a cavity ECCOSORB[®] MCS has proven to be very effective at dampening resonances due to the absorbers high permittivity and permeability as well as high loss values, which in turn reduces the overall VSWR
- ECCOSORB[®] MCS is designed for the suppression of surface currents over a wide range of frequencies
- Useful for the suppression of creeping waves and reduction of cavity resonances in microwave modules.
- ECCOSORB[®] MCS is also useful in reducing RF coupling of antennas and microwave components

Availability


- ECCOSORB[®] MCS is available in sheets 0.040" x 12" x 12" (0.101cm x 30.5cm x 30.5cm)
- Upon special request, ECCOSORB[®] MCS can be supplied in sheets up to 36" (914.4mm) in length
- It can be supplied with a Pressure Sensitive Adhesive (PSA). Product designation denoting ECCOSORB[®] MCS with a PSA is ECCOSORB[®] MCS/SS6M
- ECCOSORB[®] MCS is available in other sizes and customer specified configurations and thicknesses upon request

Instructions for Use

- ECCOSORB[®] MCS can be bonded to itself to make thicker sheets or to other substrates with either the factory installed PSA (SS6M), or STYCAST[®] 4952 along with Primer S-11

Typical Properties

Service Temperature, °F (°C)	Cryogenic to 350 (177)
Volume Resistivity	2 x 10 ⁸ ohm-cm
Relative Impedance	0.66 - 0.23
Dielectric Strength, volts/mil	>20
Nominal Thickness, inches (mm)	.040 (1.0)
Hardness, Shore A	>80
Tensile Strength, psi	>500
Elongation, %	>20
Thermal Conductivity, (cal)(cm)/(sec)(cm ²)(°C) (BTU)(in)/(hr)(ft ²)(°F)	0.0028 8.5
Fire Retardancy	UL-94 V1
%TML (with SS6M)	0.3 (0.23)
%CVCM (with SS6M)	0.05 (0.05)
Weight, lb/ft ² (kg/m ²)	0.9 (4.39)
Weight, lb/ft ² (kg/m ²) with SS6M PSA	1.0 (4.87)

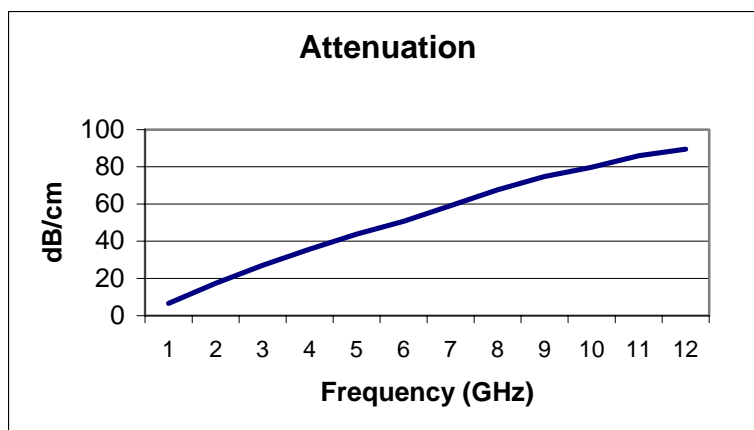

EMERSON & CUMING MICROWAVE PRODUCTS, INC., 28 York Avenue, Randolph, MA 02368 / Telephone (781) 961-9600. Use of Information and Material: Values shown are based on testing of laboratory test specimens and represent data that falls within normal range of the material. These values are not intended for use in establishing maximum, minimum or ranges of values for specification purposes. Any determination of the suitability of the material for any purpose contemplated by the user and the manner of such use is the responsibility of the user. The user should determine that the material meets the needs of the user's product and use. We hope that the information given here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale INCLUDING THOSE LIMITING WARRANTIES AND REMEDIES, which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions nor do we intend them as a recommendation for any use, which would infringe any patent or copyright. Emerson & Cuming Microwave Products Inc.